



# SLIMLINE 1500


## 1,500 WATT DC TO AC INVERTER

### TURN SOLAR ENERGY & OTHER DC POWER INTO GREEN HOUSEHOLD ENERGY

Use your blender, power tool, or other appliance away from the house!

The Slimline 1500 converts DC power into usable AC current. It features three standard AC outlets for your favorite household appliances and two USB sockets for charging phones, tablets, and more!

Dependable and powerful, it guarantees a continuous 1,500 watts of TrueRated Power with up to a 3,500 watt surge. The Slimline 1500 uses improved electrical circuits with surface-mount technology (SMT), outlasting others in mechanical performance!

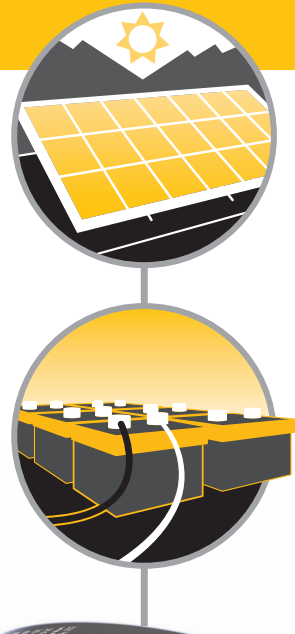

### TRUERATED POWER™



### SPECIFICATIONS

	12V	24V	48V
Continuous Power	1,500 Watts		
Surge Power	3,500 Watts		
Input (12V/24V/48V)	11-15V	21-28V	42-56V
Output	115-125V		
Output Waveform	Modified Sine Wave (MSW)		
Overheat Protection	Yes		
Overload Protection	Yes		
AC Outlets	3x NEMA 5-15 USA		
USB Outlets	2x 3.0A (shared), 5V		
Dimensions of unit	11.7 x 5.2 x 2.6 (in.)		
Weight of unit	5.2 lbs		
Cables	Included		



### 2-YEAR LIMITED WARRANTY

©2016 WAGAN CORP. ALL RIGHTS RESERVED.