


# KISAE Transfer Switch

## TR 15-120 (15A)

## TR 20-120 (20A)

Specification:	TS 15-120	TS 20-120
<b>AC Input</b>		
Utility/Shore AC Input Voltage/Frequency	120 VAC/ 60 or 50 Hz	
Inverter AC Input Voltage	120 VAC/ 60 or 50 Hz	
AC Input current	15A max	20A max
Utility/Shore AC Input Connection	Hardwire cord AWG 16, 2 feet	Hardwire cord AWG 14, 2 feet
Inverter AC Input Connection	15A Power plug AWG 16, 5 feet	20A Power plug AWG 14, 5 feet
<b>AC Output</b>		
Load AC Output Voltage/Frequency	Same as Utility/Shore or Inverter AC Input	
Load AC Output	Hardwire cord AWG 16, 2 feet	Hardwire cord AWG 14, 2 feet
Load AC Output Protection (supplementary breaker)	15A	20A
<b>Transfer Switch</b>		
Transfer Time	< 100 ms	
<b>Regulatory Compliance</b>		
Markings	cETLus	
Conformance	Conforms to UL 1008	
<b>KISAE product use</b>	SW 1204, 1210 series	SW 1220 series

TS 15-120 and TS 20-120 Wiring Block Diagram

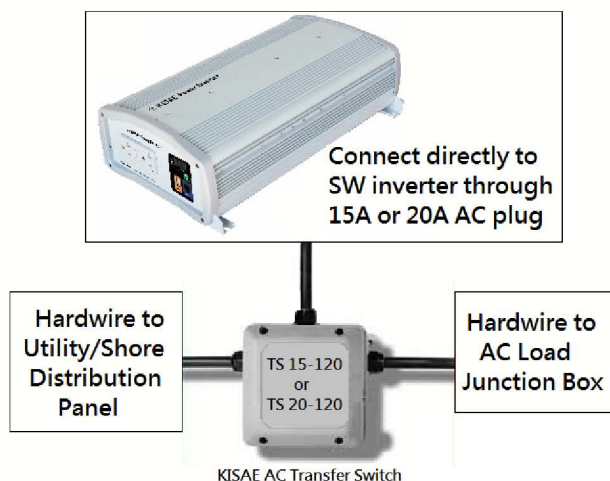

**KISAE Technology Co. Ltd.**  
Room 206, 2nd Floor, Alliance Building,  
130-136 Connaught Road Central,  
Hong Kong

email: [info@kisaetechlogy.com](mailto:info@kisaetechlogy.com)  
[www.kisaetechlogy.com](http://www.kisaetechlogy.com)