



samlexsolar

A Division of Samlex America Inc.

**Remote
Control**

**Model:
SAM-RC**

**Owner's
Manual**

Please read this
manual before
operating the
units

INDEX

1. Introduction.....	2
2. General Information.....	3
3. Operation.....	6
4. Specifications.....	6
5. Warranty.....	7

1

INTRODUCTION

Description


The SAM-RC is a wired Remote Control used with selected models of SAM Series of Inverters to switch on and switch off the Inverter from a remote location. It also displays the operational status of the Inverter using colored LEDs.

Applicable Models of SAM Inverters

The SAM-RC Remote Control is designed to work with the following models of the SAM Series:

- SAM-1000-12
- SAM-1500-12
- SAM-2000-12
- SAM-3000-12

Layout and Operation of Controls and LED Indications

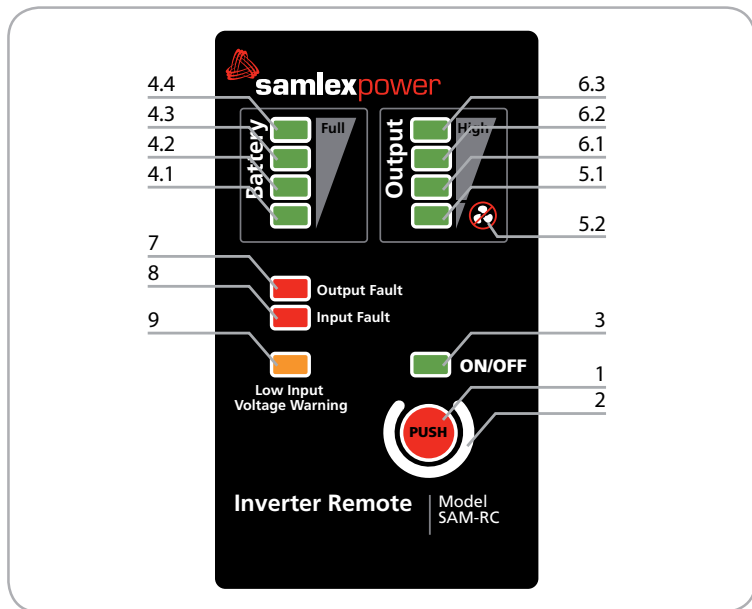

1. On / Off Push Button. Used to switch on and switch off the Inverter.



NOTE: For switching on and switching off the Inverter using this Remote Control, the Main On / Off Switch on the Inverter should be in the Off position.

If the On / Off Switch on the Inverter is left in On position, the Inverter cannot be switched off using this Remote Control. The Remote Control will, however, continue to display the status of operation.

2. Annular ring with White LED backlighting around the On / Off Push Button for assistance in identifying the location of the On / Off Push Button in dark conditions.

GENERAL INFORMATION

- LED 6.1 and 6.2 are lighted: Power drawn by the load is 60% to 79% the rated output power of the Inverter
- LED 6.1, 6.2 and 6.3 are lighted: Power drawn by the load is 80% to 100% of the rated output power of the Inverter



NOTE: When the Green LED 5.1 is lighted, it indicates that the power drawn by the load is less than 10% of the rated output power of the Inverter. As the load increases from 10% to 100% of the rated capacity of the Inverter, LED 5.1 extinguishes and LEDs 6.1 to 6.3 light up in succession. In a normal Bar Graph, LED 5.1 would have continued to be lighted for loads > 10%. However, as the lighted condition of LED 5.1 is also used to display the Off status of the load controlled cooling fan inside the Inverter, it is extinguished when the load exceeds 10% of the rated output power of the Inverter indicating that the cooling fan is switched On.

7. Red LED showing "Output Fault" due to one of the following reasons:
 - Overload / short circuit on the output side
8. Red LED showing "Input Fault" due to one of the following reasons:
 - Shut down due to input voltage from the battery seen at the DC input terminals of the Inverter is 10.5 or below
 - Shut down due to input voltage from the battery seen at the DC input terminals of the Inverter is 15.2 V or higher
 - Shut down due to over temperature
9. Amber LED marked "Low input Voltage Warning" indicating the following:
 - Warning that the input voltage from the battery seen at the DC input terminals of the Inverter is getting low i.e. below 11.6 VDC. The Inverter will shut down when the voltage drops down to 10.5 VDC
10. (Not shown. Located at the back of the Remote). 8P8C (8 Position, 8 Conductor) Modular Connector Receptacle (also known as RJ-45 Receptacle) used for connecting the Remote Control to the Inverter.



NOTE: 3 meters length of Cat 5, Networking Cable with 8P8C (8 Position, 8 Conductor) Modular Plugs (RJ-45) on the two ends is provided for connecting the Remote Control to the Inverter.

3

OPERATION

The Remote Control is provided with 3 meter length of Cat 5 Networking Cable with 8P8C (8 Position, 8 Conductor) Modular Plugs (RJ-45) on either ends . Plug one end of the cable to the receptacle on the Remote Control.

Locate the 8P8C (8 Position, 8 Conductor) Modular Receptacle (RJ-45) on the inverter and securely insert the other end of the plug on the Remote Control cable.

For switching on and switching off the Inverter using this Remote Control, the Main On / Off Switch on the Inverter should be in the Off condition.



CAUTION! If the On / Off Switch on the Inverter is left in On position, the Inverter cannot be switched off using this Remote Control. The Remote Control will, however, continue to display the status of operation.

Please see under “**Layout and Operation of Controls and LED Indications**” for display information.

4

SPECIFICATIONS

	MODEL NO.	SAM-RC
APPLICABLE MODELS OF INVERTERS		SAM-1000-12, SAM-1500-12, SAM-2000-12, SAM-3000-12
RECEPTACLE FOR CONNECTING CABLE		8P8C (8 Position, 8 Conductor) Modular Receptacle (RJ-45)
CONNECTING CABLE TYPE		8 Conductor, Cat 5 Networking Cable
CONNECTING CABLE, LENGTH		3 meters
CONNECTING CABLE, CONNECTORS		8P8C (8 Position, 8 Conductor) Modular Plugs (RJ-45) on both ends
DIMENSIONS (WITHOUT CABLE),MM (L x W x H)		115 x 70 x 27
DIMENSIONS (WITHOUT CABLE), IN (L x W x H)		4.6 x 2.8 x 1.1
WEIGHT (WITHOUT CABLE), KG		0.056
WEIGHT (WITHOUT CABLE), LB		0.12

NOTE: Specifications are subject to change without notice

2 YEAR Limited Warranty

The SAM-RC Remote Control manufactured by Samlex America, Inc. (the “Warrantor”) is warranted to be free from defects in workmanship and materials under normal use and service. This warranty is in effect for 2 years from the date of purchase by the user (the “Purchaser”). For a warranty claim, the Purchaser should contact the place of purchase to obtain a Return Authorization Number.

The defective part or unit should be returned at the Purchaser’s expense to the authorized location. A written statement describing the nature of the defect, the date of purchase, the place of purchase, and the Purchaser’s name, address and telephone number should also be included.

If upon the Warrantor’s examination, the defect proves to be the result of defective material or workmanship, the equipment will be repaired or replaced at the Warrantor’s option without charge, and returned to the Purchaser at the Warrantor’s expense.

No refund of the purchase price will be granted to the Purchaser, unless the Warrantor is unable to remedy the defect after having a reasonable number of opportunities to do so. Warranty service shall be performed only by the Warrantor. Any attempt to remedy the defect by anyone other than the Warrantor shall render this warranty void.

There shall be no warranty for defects or damages caused by faulty installation or hook-up, abuse or misuse of the equipment including exposure to excessive heat, salt or fresh water spray, or water immersion.

No other express warranty is hereby given and there are no warranties which extend beyond those described herein. This warranty is expressly in lieu of any other expressed or implied warranties, including any implied warranty of merchantability, fitness for the ordinary purposes for which such goods are used, or fitness for a particular purpose, or any other obligations on the part of the Warrantor or its employees and representatives.

There shall be no responsibility or liability whatsoever on the part of the Warrantor or its employees and representatives for injury to any persons, or damage to person or persons, or damage to property, or loss of income or profit, or any other consequential or resulting damage which may be claimed to have been incurred through the use or sale of the equipment, including any possible failure of malfunction of the equipment, or part thereof.

The Warrantor assumes no liability for incidental or consequential damages of any kind.

Samlex America Inc. (the “Warrantor”)
110-17 Fawcett Road
Coquitlam BC V3K6V2 Canada
(604) 525-3836



samlexsolar

A Division of Samlex America Inc.

110-17 Fawcett Rd
Coquitlam, B.C.
Canada V3K 6V2

T: 604 525 3836
F: 604 525 5221

e-mail: samlex@samlexamerica.com
website: www.samlexamerica.com